


MERILNIKI DC NAPETOSTI ALI TOKOV Z VRTLJIVO TULJAVICO

Merilniki z vrtljivo tuljavico so namenjeni za merjenje enosmernih tokov ali napetosti. Merilni sistem z jedrnim magnetom je neobčutljiv na tuja elektromagnetna polja in je odporen proti mehanskim udarcem in vibracijam. Potek skale je v celotnem območju linearen. Številčnica je izmenljiva. Razred točnosti je 1,5.

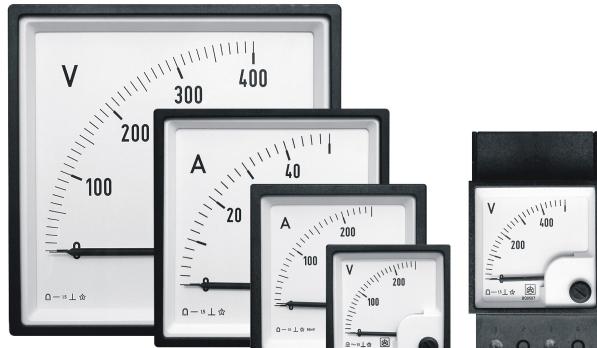

BQ 0x07


BQ 0507

BQ2x07

BQ 2507

METERS FOR DC VOLTAGE OR CURRENT WITH A MOVING COIL

Meters with a moving coil are intended for measurement of direct currents or voltages. A measuring system with a core magnet is not sensitive to external electromagnetic fields and is resistant to mechanical impacts and vibrations. The scale is entirely linear and interchangeable. The accuracy class is 1,5.

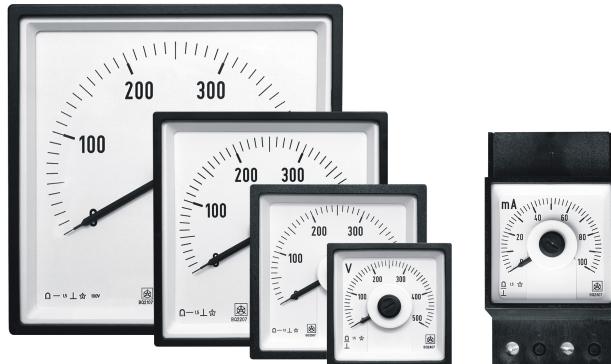

TIP <i>TYPE</i>	BQ 0507	BQ 0407	BQ 0307	BQ 0207	BQ 0107	BQ 2507	BQ 2407	BQ 2307	BQ 2207	BQ 2107	
Čelni okvir (mm) <i>Front frame (mm)</i>	45 x 45	48 x 48	72 x 72	96 x 96	144 x 144	48 x 48	48 x 48	72 x 72	96 x 96	144 x 144	
Irez za vgradnjo (mm) <i>Cutting for mounting (mm)</i>	-	45 x 45	68 x 68	92 x 92	138 x 138	-	45 x 45	68 x 68	92 x 92	138 x 138	
skala 90° <i>scale 90°</i>						skala 240° <i>scale 240°</i>					
Dolžina skale (mm) <i>Scale length (mm)</i>	41	41	63	95	140	71	71	113	155	235	
MERILNO OBMOČJE <i>RATING</i>											
0-40 µA...60 µA	-	•	•	•	•	-	-	-	-	-	
0-100 µA...600 µA	•	•	•	•	•	•	•	•	•	•	
0-1 mA...600 mA	•	•	•	•	•	•	•	•	•	•	
4...20 mA ³⁾	•	•	•	•	•	•	•	•	•	•	
0-1A...6A	•	•	•	•	•	•	•	•	•	•	
0-10 A...25 A	-	•	•	•	•	-	•	•	•	•	
0-40 A, 60 A	-	-	•	•	•	-	-	•	•	•	
0-100 A	-	-	-	-	•	-	-	-	-	-	
xA/60 mV ¹⁾	•	•	•	•	•	•	•	•	•	•	
0-100 mV...600 mV	•	•	•	•	•	•	•	•	•	•	
0-1V...600 V	•	•	•	•	•	•	•	•	•	•	

